HOTPOINT SERVICE OFFICES

nearest Hotpoint Service Office tackles the problem. think is applicable. It does not matter if you guess wrong: we'll make sure that the If you have any trouble with your appliance, please call whichever of these numbers you

NORTH WEST Cumbria, Lancaster: Aumitord House, 28 Hightgale, Kendal, Cumbria Lancasthre: 24/25 Cannon Streel, Preston, Lancasthre Gratter Manchester: 44/45 Salon Road, Heatlon Mersey, Stockport Morseyside: 40 Cowley Hill Lane, St. Helens, Merseyside Cheshre, Wirmi: 1 Church Parade, Ellesmere Port, South Wirral	NORTH EAST N. Humbs, E. Yorks: Custom House Building, Whitefriargate, Hull S. Yorks: Nopiny Richards, Mexborough, South Yorkshire N. & W. Yorks: Sandbook Lane, Wetherby, West Yorkshire S. Dunham, Elevit 8: S. Dunham, Elevit 8: S. Dunham, Time & Wear, N'thumbert 4: N. Dunham, Tyne & Wear, N'thumbert 4: 4. Northumberland Road, Newcastle upon Tyne
Tel: Kendal 24483 Tel: Presion 24311 Tel: 061-442 8677 Tel: St. Helens 35152 Tel: 051-356 2141	Tel: Hull 224777 Tel: Mexborough 582831 Tel: Welherby 61444/61261 Tel: Middlesbrough 248436 Tel: Newcastle 321008
SOUTH WEST Gloucs, Avon, Wilts, Somerset: 3.5 Brisington Hill, Brisington, Bristol Comwall, Devon: 69 Mulley Plain, Plymouth Hampshire, Dorset: South Hampshire Industrial Park, Salisbury Road, Tolton, Hants.	Middlesex, S. Harts: 68 East Lane, Wembley, Middlesex London: 68 East Lane, Wembley, Middlesex London: 68 East Lane, Wembley, Middlesex Surrey: 2 St. Nicholas Road, Sutton, Surrey Susses: 1 Kingswood, North Street, Halisham, Sussex Kent: Larkfield Trading Estate, New Hythe Lane, Larkfield, Kent Tel: 01-908 1933 Tel: 01-904 1250 Tel: 01-904 1250 Tel: 01-908 1933 Tel: 01-904 1250 Tel: 01-908 1933 Tel: 01-904 1250 Tel: 01-908 1933 Tel: 01-908 1933

Tal. Briefol 74 4474	& W MIDLANDS
101.001.000 6171	hurch Parade, Ellesmere Port, South Wirral
Tal: 051_356 2141	owley Hill Lane, St. Helens, Merseyside
Tel: St. Helens 35152	ib Station Road, Heaton Mersey, Stockbort rseyside:
Tel: 061-442 8677	ater Manchester:
Tel: Preston 24311	nioro mouse, zo nigirgate, ventori, como la cashiro:
Tel: Kendal 24483	noria, Lancaster:

Industrial Buildings, Beehive Lane, Chelmsford, Essex	Celta Road, Fletton, Peterborough, Cambs.	92 Upper St. Giles Street, Norwich	Norfolk, Suffolk:	Bods, N. Horis:	EASTERN	Ashling Street, Nottingham
rd, Essex	1 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Tel: Peterborouteh 64741	Tel: Norwich 620581	Tel: Luton 452211		

SCOTLAND

Tel: Aberdeen 642283

Tel: Dundee 28383

Tel: 041-886 624 Tel: 031-554 143:

Tel: Nottingham 862431	lotts, Derbys: shling Street, Nottingham
Tel: Wellingborough 223669	orthants, Warwicks: 9B Cambridge Street, Wellingborough, Northants.
Tel: Peterborough 64741	Lines: Lines:
Tel: Lincoln 33611	Lines, S. Humbers:
Tel: Leicester 29936	e Montfort House Balarque Cate Leicester

公式の公正式でに行

Industrial Buildings, Beehive Lane, Chelmsford, Essex	Celta Road, Fletton, Peterborough, Cambs.	Cambs, Hunts:	Nortolk, Suffolk: Nortolk, Suffolk: Nortolk, Suffolk:	EASTERN Beds, N. Herts:
	Tel: Chelmsford 269331	Tel: Peterborough 64741	Tel: Norwich 620581	Tel: Luton 452211

e Suezt, weiningodiough, wormains. ▼: Nottingham	Varwicks: Tel: Wellingborough 223669	Tel: Peterborough 64741	pelitave date, Leicester		
ngham 862431	rough 223669	orough 64741	Tel: Lincoln 33611	Tel: Leicester 29936	
.=-	_	_			

Tel: Luton 452211 Grawley Road, Liton, Beds Grawley Road, Liton, Beds Grawley Road, Liton, Beds Tel: Norwich 620581 Tel: Peterborough 620581 Tel: Peterborough 64741 Isla Road, Fletton, Peterborough, Cambs. ### Tel: Peterborough 64741 Tel: Peterborough 64741 Tel: Peterborough 64741 Tel: Chelmsford 268331
--

Buildings, Beehive Lane, Chelmsford, Essex	d, Fletton, Peterborough, Cambs	Hunts:	Suffolk:	Horis:	
nsford, Essex	Ģ				
	Tel: Chelmsford 269331	Tel: Peterborough 64741	Tel: Norwich 620581	Tel: Luton 452211	

Tel: Aldridge 55641/55861	ds:
Tel: Kidsgrove 74511	AGII
Tel: Didcot 817711	ingion, prison
lei: Bristol /144/1	ington Rrietol

West Lodge Road, Blythswo	Strathclyde, Dum	0	Bannerman House	Tayside, Fife, P.	Holbeck House, 68	urampian. It land
ood Estate, Renfrew	t, Galloway:	lers:	Tay Street, Dundee		Carden Place, Aberdeen	

18 Western Avenue, Bridgend Industrial	Mid & S. Wales:	Conwy Road, Llandudno Junction	North Wales:	WALES
Estate, Bridgend, Mid-Glamorgan	Tel: Bridgend 64121		Tel: Deganwy 82626	

niretand:
eau Road, Belfast 7
Tel: Dublin 725922

Norther 256 Orm Eire: 35/36 Ar

REL

Sometimes a number is changed when an edition of this booklet is still current. So if you get no reply from one of these, either try another of the numbers shown here, or see under Hotpoint in your telephone book.

Hotpoint Ltd., Peterborough, England, PE2 9JB

How to use your Hotpoint Fridge

Models 8211 and 8212

your fridge for the first time. Please read right through this instruction book before using

ELECTRICAL REQUIREMENTS

old plug and throw it away, do not insert it into a socket elsewhere in the house as this could cause a shock hazard has a 13A fuse. If the plug does not fit your sockets, a new plug can be fitted. Cut off the All Hotpoint appliances come complete with a fitted plug. The plug on your fridge

IMPORTANT: Fitting a Different Plug: WARNING: THIS APPLIANCE MUST BE EARTHED

The wires in the mains lead are coloured in accordance with the following code:

Green and Yellow - Earth - Neutral

If you fit your own plug the colours of these wires may not correspond with the

identifying marks on the plug terminals. This is what you have to do: Connect the green and yellow (Earth) wire to the terminal in the plug marked 'E' or

- with the symbol \Rightarrow , or coloured green or green and yellow.
- Connect the blue (Neutral) wire to the terminal in the plug marked 'N' or coloured

Connect the brown (Live) wire to the terminal marked 'L' or coloured rec

approved fuse to BS1362 must be fitted. main fuse box. In the event of replacing a fuse in the plug supplied, a 13A ASTA With alternative plugs a 5A fuse must be fitted either in the plug or adaptor or in the

nearest Hotpoint Service Office or local Electricity Board. The colour of the correct replacement fuse cover is that of the coloured marks or insert in the base of the plug fuse cover has been obtained and fitted. A new fuse cover can be obtained from your freezer be certain to make the lock unusable. WARNING - Avoid accidents to children. When discarding an old fridge or fuse. In the event of losing the fuse cover, the plug must **not** be used until a replacement If the plug is the moulded on type the fuse cover must be refitted when changing the

224/2258/40

င္တ

WHERE TO PUT YOUR FRIDGE

surface is often a good position. Try to avoid putting it near anything which gives off heat, a cooker or radiator for example. If this is unavoidable an air gap of $10\,\mathrm{mm}$ (½") must be left between the hot object and the fridge. In such a position your fridge will Your fridge should be placed where it is easy to use, alongside or beneath a work

have to work harder and will cost more to run. Once you have decided on the most suitable place, fit the two wall spacers supplied to

the spacers are against the wall. This automatically ensures adequate air circulation at the the top of the black condenser (at the back of the fridge) and push the fridge back until

back of the fridge.

grille at the rear of your work surface. This grille, Part No. 256090, is available from there is not enough clearance available, ventilation can be provided by fitting a special least $20 \,\mathrm{mm}$ (¾") between the top of the fridge and the underside of the work surface. If If the fridge is placed underneath a work surface make sure that there is a gap of at

your local Hotpoint Service Office (see back page). If the fridge is to be located next to a freezer leave a gap of 50 mm (2") between the

until all four feet are in firm contact with the floor. Correct adjustment avoids excessive two to avoid a build-up of condensation. Finally, make sure your fridge is standing correctly by adjusting the two front feet



A Wheel Kit, Part No. 282268, is available from your local Hotpoint Service Office

(see back page) for fitting to the back of your fridge. Note: You should not stack your fridge with any other appliance.

REPOSITIONING THE DOOR HINGE

Just follow the step by step instructions below:

Tools required

1. Take out all the loose fittings such as shelves, chiller tray and salad crisper from the A pointed knife, a 7mm and 8mm A/F Spanner and a No. 2 Pozidriv.

inside of the fridge. 2. Carefully lay the fridge on its back (you may need assistance for this) using the

original packing and keeping any pipework clear of the floor.

4. Remove the clamping plate (B) and bottom hinge (C) by unscrewing the two 3. Unscrew and remove the two front feet (A).

screws (D). Make sure that if any packing washers (E) are fitted they are left on the

side of the cabinet, making sure the hole in the cabinet for the foot is not covered over. 5. Remove the bottom screws (F), washers and plate (G) and fit them on the opposite

GUARANTEE **FIVE YEAR**

FIVE YEARS. delivered, Hotpoint guarantees it for From the moment your fridge is


completely free of charge, provided they are fitted by Hotpoint's own Service Engineer. Labour costs are During the five years all parts are

also covers loss of food up to £250 in the chargeable after the first year. Our FIVE YEAR GUARANTEE

first year. accidents, negligence or power cuts. with or taken apart by anyone who is Kingdom and must not be tampered The fridge must be used in the United not an authorised Hotpoint no way limits your legal rights. representative. Hotpoint's guarantee in This guarantee does not cover

Loss of food cover

the benefit of Hotpoint's Extended after the first year. If you wish to enjoy for loss of food for a further four years application card and send it, with your Food Cover please fill in the enclosed remittance, to your nearest Hotpoint Service Office, addresses shown on the You can choose to extend the cover



Proof of purchase

safe place. For future reference please attach your purchase receipt to this booklet and keep it in a

In accordance with its policy of progressive product design, the Company reserves the right to alter specifications.

WHAT TO DO IF AIN Y THUNG GOES WRONG

1. Check that the plug is firmly in the wall socket and local Hotpoint Service Office. Just run through these quick checks before calling your

- 2. Check the power supply to the socket by plugging in another appliance. that the power supply is on.
- 3. If the other appliance works, check the fuse in the refrigerator's plug.
- 4. If you have changed the plug, check the wiring (see
- 5. If there is excessive noise or vibration, check that al four feet are firmly in contact with the ground (see
- 6. If the interior light fails to work, refer to page 9 for further instructions.



telephone number is shown on nearest Hotpoint Service Office (or local importer if outside the United Kingdom). The If, after following all these instructions, you are still having problems, contact your


1. Your name, address and post When you contact us we need

- 2. Your telephone number.
- 3. Clear and concise details of the
- 8212), and colour. 4. The model number (8211 or
- 6. If you have taken out the put the date here 5. When it was purchased. Please

details before you call Make sure you have all these Cover (see opposite page). Hotpoint Five Year Loss of Food



- 6. Remove the door by gently pulling it downwards until clear of the top hinge.
- but not the washer (K). Make sure the screw heads do not protrude below the recess. 7. Remove the top hinge (H) by unscrewing the two screws (J) - replace the screws (J)
- (H), with the washer (K) on top, in the recess. Tighten the screws so that they are just 8. Remove the two screws (L) in the opposite recess and use them to fit the top hinge
- adjacent surfaces. Reposition them on the opposite side of the door. must be swapped over. Prise them out of their location, taking care not to mark the 9. Before refitting the door, the plug (M) and the top and bottom hinge bushes (N)
- remove the four screws (R) and swap over the insert. Refit the four screws. Reposition the door handle insert (P) on the opposite side of the door. To do this,
- hinge bush on the top hinge pin. Adjust the position of the top hinge so that the door fits 11. Refit the door by laying it on the cabinet and, sliding it upwards, locate the top
- door fits evenly. pin, fit the bottom hinge pin (C) into the hinge bush (N). Adjust as necessary so the 12. With all the packing washers that may have been originally fitted (E) retained on the
- and two screws (D). The clamping plate should be fitted with the long straight side from the bottom of the cabinet. Replace both adjustable front feet (A) setting them at approximately 25 mm (1") facing the outside edge of the cabinet and the large hole towards the rear of the cabinet. 13. The bottom hinge can now be secured to the cabinet using the clamping plate (B)

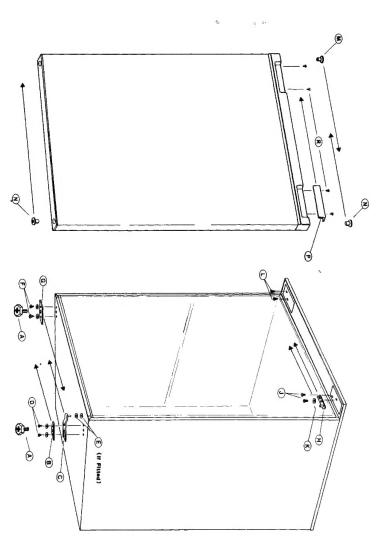

- 15. Stand the fridge up and put it where you have decided to locate it. Ensure it is standing correctly by adjusting the two front feet until all four feet are in firm contact with the floor.
- 16. Check the door opens and closes easily. Ensure the door seal does not bind on the hinge side and that there are no gaps allowing air into the cabinet. Adjust the hinges if necessary.
- 17. Tighten the top hinge screws.
- 18. Finally put back all the loose fittings inside the fridge.

GETTING THE FRIDGE READY FOR USE

Before using your fridge for the first time, the interior, including the door, and all removable parts should be wiped out. Use a damp cloth wrung out in either a solution of one teaspoonful of bicarbonate of soda to one pint of water or Milton diluted according to the manufacturer's instructions.

WARNING: Never use any household cleaner or detergent, abrasive powders or wax polish. These not only damage the surfaces, they also leave a smell in the fridge.

Final Check

Before you start using the fridge, check that

- 1. it is thoroughly dry inside,
- 2. air can circulate freely,
- 3. the feet have been adjusted, ie. all four are firmly on the ground.

Starting

Insert the plug into the wall socket and switch on the supply. Open your fridge door and the light will come on. There is a control dial on the right-hand side of the fridge interior. Turning the dial clockwise from 'O' (off) will start the fridge working. You will hear a noise as the compressor starts up.

Running-in the compressor

Your fridge is operated by a compressor which switches on and off in order to maintain the fridge's temperature. The compressor is a precision piece of machinery like a car engine, and requires a running-in period of up to two months. During this time the compressor has to work a little harder and this may result in more noise than usual.

CONTROLLING THE TEMPERATURE

Frozen food compartment

The control dial, on the right-hand side of the fridge interior, controls the temperature in the frozen food compartment and is marked 'O' (off), min ... 9. Which setting is selected depends on how long you want to store frozen food.

Your fridge gives you a two star (***) performance in the frozen food compartment. This is achieved by setting the control dial to 5 and allows you to store frozen food for up to one month. This is the most popular setting.

Clean the outside of the fridge, but not the door seal, with a damp cloth, using a small amount of detergent, followed by a wipe down with a clean cloth. Do not use an abrasive powder. The rubber door seal must be cleaned with soap and water only as detergent will damage it.

Finally, the compressor and condenser at the back of the fridge can be carefully cleaned. Use a brush or vacuum cleaner to remove any dust. Always check that the fridge is disconnected from the mains when doing this.


Remember to replace the mains plug and switch on after cleaning your fridge.

lable top

This is designed to serve as an extra worksurface, but be careful with it. Do not drop heavy objects on it and do not sit on it!

Going away

If you expect to be away for any length of time and don't want to use your fridge, switch off at the power point and pull out the plug. Remove all food and follow the defrosting instructions (see page 8). After defrosting wipe out the interior. Always leave the door ajar to prevent the accumulation of odours.



How to replace the interior light

Should the light fail to work, **switch off and pull out the mains plug,** then ensure the bulb is screwed securely into the bulb holder. Replace the plug and switch on.

If the light still fails to work, do not worry, it will not affect the working of your fridge. Obtain a replacement SES 15 Watt bulb from a local electrical retailer or your nearest Hotpoint Service Office and then fit it as follows:

- Switch off and pull out the mains plug.
- 2. Remove the shelves to make access easier.
- 3. Slacken off the lamp guard, undoing the pozidrive retaining screw by one turn
- 4. Unclip and remove the lamp guard.
- 5. Unscrew the old bulb and fit the new one.
- Refit the lamp guard, ensuring that the two legs opposite the retaining screw fit into the holes.
- 7. Retighten the retaining screw.
- 8. Replace the plug and switch on.

CARING FOR YOUR FRIDGE

Defrosting

Why and when:


more quickly in your fridge if you leave the door open or put warm food into it. regularly. We recommend that you defrost your fridge once a week. Frost will build up frozen food compartment door difficult. This is why you must defrost your fridge Frost build-up reduces the efficiency of your fridge. It can also make closing the

the frozen food compartment. Never try to chip the frost away as you can easily damage the refrigerated surfaces of

you have frozen food in the frozen food compartment Defrosting is very simple but must be carried out as quickly as possible, particularly if

Just follow these steps:

- compartment or a cool place. 1. Remove any frozen foods, wrap in several layers of newspaper and put in the fridge
- 2. Remove the ice tray.
- 3. Move anything being stored in the chiller tray to the fridge compartment.
- 4. Close both flaps on the chiller tray.
- 5. Turn the frozen food control dial to 'O' (off). This switches the fridge off.
- 6. Place a bowl of very hot water in the frozen food compartment.
- 7. Leave the main door open.
- tray, wipe it out and dry it. 8. After defrosting, empty the chiller
- original positions. 9. Reset the chiller tray flaps to their
- food taken out of it. Replace the chiller tray and any
- food compartment. 11. Remove the bowl from the frozen
- to its original position (see page 4). 12. Reset the frozen food control dial
- replace. 13. Unwrap the frozen food and
- 15. Job done! 14. Refill the ice tray and replace.



Cleaning your fridge

ensure it is thoroughly dry. damage the surfaces, but also leave a smell in the fridge. Before you refill the fridge household cleaner or detergent, abrasive powders or wax polish. These not only interior including the door, and removable parts, should be washed. Never use any water or Milton diluted according to the manufacturer's instructions. The complete wrung out in either a solution of one teaspoonful of bicarbonate of soda to one pint of and pull out the mains plug first. Wipe out the inside of the fridge using a clean cloth It is a good idea to clean the inside of your fridge after defrosting. Always switch off

> Note: Settings above 5 will only be required if the room temperature is very warm. You can reduce running costs by opting for a one star [*] setting. This is achieved by

setting the control dial to 2 and allows you to store frozen food for up to one week.

Fridge compartment

compartment. The table below gives a guide to setting the chiller tray flaps. rear of the chiller tray control the amount of cold air that flows into the fridge fridge, how often you open the door and the room temperature. The two flaps at the temperature of the frozen food compartment. It is also affected by the location of the The temperature of your fridge compartment changes when you alter the

Frozen Fo	Control Setting	2	υ
od Compai	Star Rating	*	*
Frozen Food Compartment Setting	Temperature	−6°C (21°F) or colder	-12°C (10°F) or colder
Sug	Cool Room Temperature	1 Open 1 Closed	Both Closed
Suggested Flap Settings	Average Room Temperature	1 Open 1 Closed	Both Closed
ings	Warm Room Temperature	Both Open	1 Open 1 Closed

adjustments are necessary, proceed as follows: The chiller tray must be pulled out of the fridge in order to adjust the flaps. If further

Flap Closed

Fridge compartment too warm:

Open one or both chiller tray flaps. If the fridge compartment is still too warm


a colder setting (higher number). with both flaps open, turn the control dial to



Close one or both chiller tray flaps

to a warmer setting (lower number). If the fridge compartment is still too cold with both flaps closed, turn the control dial





STORING FOOD

You can store most fresh foods in your fridge compartment. Recommended maximum storing times are given in the table below.

Raw fresh meat	joints, steaks, chops	3-5
	offal (liver, kidney etc) minced meat, sausages	2
Cooked meat	including made-up dishes and left-overs	2-3
Poultry	fresh whole (store giblets separately)	2-3
	giblets	2
	cooked	2-3
Fish	raw	1-2 -
	cooked	2-3
Bacon		7-10
Milk, cream, salad; vegetables	; vegetables	3-4

 Weeks

 Butter, margarine and cooking fats
 3-4

 Cheese
 hard
 3-4

 cream
 1

 Eggs
 2

All foods should be wrapped or covered to prevent drying out and flavour transference. Plastic bags, containers with lids, foil and plastic stretch wrap are ideal. Never put hot or warm food into your fridge as this reduces efficiency.

Storing food in the frozen food compartment

You can store up to 3.7kg (8.1lb) in your frozen food compartment. Storage times depend on the setting you use and the type of food being stored. For best results always store pre-packed frozen foods in accordance with the frozen food manufacturer's instructions. Some packs will be marked with star markings matching those on the door of the frozen food compartment. Frozen food should be wrapped when bought and stored as soon as possible.

If you have set your frozen food compartment to give two star (**) performance (setting 5 in normal conditions), you can store frozen food for the following approximate periods:

4 weeks	Vegetables, Lean Meat, Ice Lollies
3 weeks	Fruits, Pastries, Dairy Products
2 weeks	Sensitive Fruits (eg. Strawberries)
	approximate periods.

The exact period will vary with the nature of food stored.

If your frozen food compartment is set to give one star $\boxed{*}$ performance (setting 2) frozen food should not be stored for more than one week.

Storing food in the chiller tray

You can store fresh food in the chiller tray, but you should remember three things:

- Do not allow it to touch the frozen food compartment or it will become stuck.
- It will tend to freeze as this is a very cold area.
- Do not attempt to store frozen food in this area, it is not cold enough to keep it fully frozen.

Do's and Don'ts

DO

- Take off any unusable leaves on vegetables and wipe off any soil
- Leave lettuce, cabbage, parsley and cauliflower on the stem.
- Wrap cheese tightly in cling film excluding as much air as possible. For best results take out of the fridge an hour before eating.
- Wrap raw meat and poultry loosely in polythene or aluminium foil. This prevents drying.
- Wrap fish and offal in polythene bags and store as close to the frozen food compartment as possible, the chiller tray is a good place, but follow the instructions on page 6.
- Wrap foods which have a strong odour, or can dry out, in polythene bags aluminium foil or place in airtight containers.
- Wrap bread well to keep it fresh.
- Chill white wines, beer, lager and mineral water in the fridge compartment before serving.
- Wrap frozen food when you buy it and put it into the frozen food compartment as soon as possible.
- Empty and refill the ice tray periodically to ensure freshness.
- Store frozen foods in accordance with the instructions given on the packets that you
 ...
- Defrost the frozen food compartment regularly (see page 8)

ÖZ

- Store bananas in your fridge.
- Store melon in your fridge. It can be chilled for short periods as long as it is wrapped to avoid it flavouring other food.
- Wash eggs as this removes their natural protective film. Wipe them instead
- Use eggs straight from the fridge, especially when making cakes or mayonnaise.
 Allow them to reach room temperature before use.
- Leave the door open for long periods as this will cause excessive ice formation and make the fridge more costly to run.
- Cover the shelves with any protective materials which may obstruct air circulation through them.
- Put liquid-filled bottles or sealed cans containing carbonated liquids (fizzy drinks, etc) in the frozen food compartment as they may burst.
- Try to keep frozen food which has thawed; it should be caten within 24 hours or cooked and refrozen.
- Give children lollipops and water ices direct from the frozen food compartment.
 The low temperature may cause 'freezer burns' on their lips.